



## NEWAGE EPOXY SUBMITTAL



NO-HUB PIPE 10 FEET				
NOM	B	J	T	
SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	NOM.	MIN.
1 1/2	1.50	1.90	0.16	0.13
2	1.96	2.35	0.16	0.13
3	2.96	3.35	0.16	0.13
4	3.94	4.38	0.19	0.15
5	4.94	5.30	0.19	0.15
6	5.94	6.30	0.19	0.15
8	7.94	8.38	0.23	0.17
10	10.00	12.50	0.28	0.22
12	11.94	8.38	0.28	0.22
15	15.11	15.83	0.36	0.30

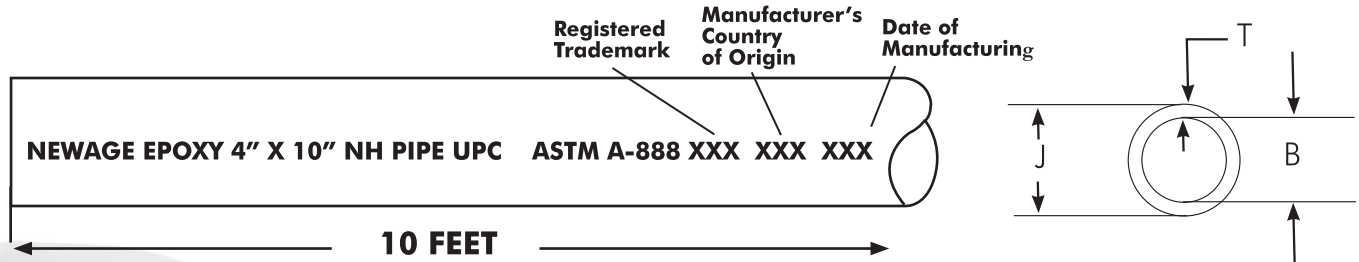


Quarter Bend




Wye


- Certified to conform to ASTM A888-11 Standard Specification and CISPI 301 for No-Hub Cast Iron and Fittings through IAPMO R&T Laboratory File 4818.
- NewAge Soil Pipe Products No-Hub Cast Iron Soil Pipe and Fittings meet the requirements of ICC International Plumbing Code 200 for material outlined in Chapter 7 for sanitary drainage systems (Sections 702, 705, & 708).
- Two part epoxy coating shall be 2.5 mil thickness on exterior and 5 mil thickness on interior for superior adhesion, chemical (acid & alkali) resistance, durability, fire resistance, heat resistance, and superior flow characteristics.
- Two part epoxy coating shall be sprayed on for superior coating, performance, and aesthetic appeal .
- Two part epoxy coating shall be tested to be non reactive from 2pH - 12pH range for 30 days.
- Two part epoxy coating will not sag, cold flow or become soft.
- Two part epoxy coating resists cavitation and cathodic disbondment.




Double Quarter Bend



P-Trap w/1/2" Primer Tap



San Cross

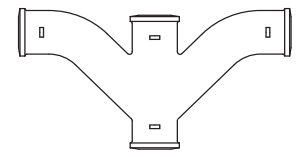

Double Combining Wye & 1/8" Bend